


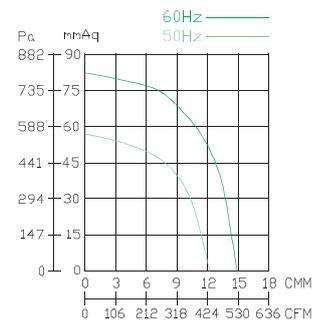
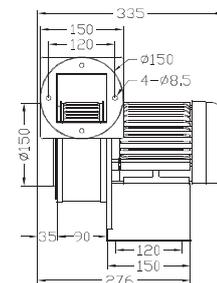
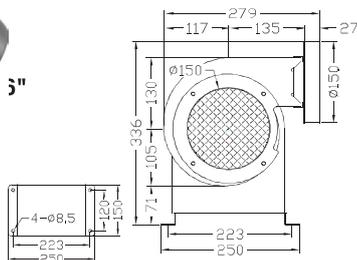


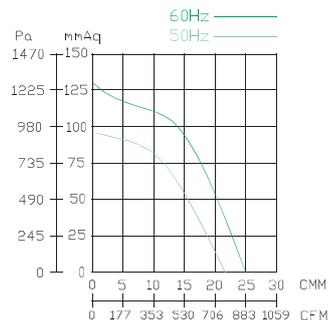




CY 150

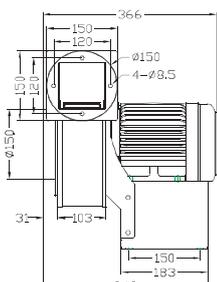

CY 180

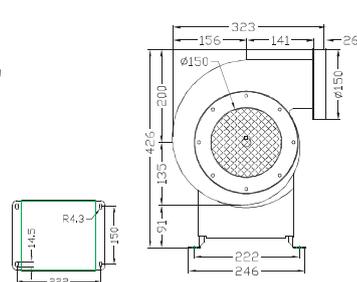

CY 200

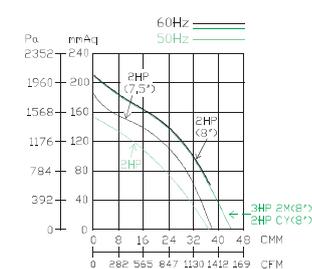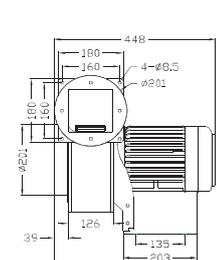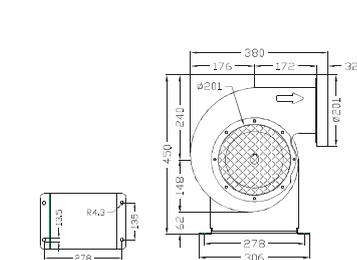

Specification

Mode	Rated Voltage	Frequency	Phase	Pole	Current	Power	Speed	Max. Air Flow			Max. Pressure			Weight	
	V							Hz	ø	P	A	Watt/HP	R.P.M.		CMM
CY 150	110/220	50	1	2	5.5 / 2.8	1/2 HP	2930	12.5	750	441	58	2.28	569	16	
		60			6.4 / 3.2						84	3.30	824		
	220/380	50	3		1.8 / 1.0						58	2.28	569		15
		60			2.0 / 1.01						84	3.30	824		
CY 180	110/220	50	1	2	8.2 / 4.2	1 HP	2800	21.5	1290	759	92	3.62	902	22	
		60			11.4 / 5.8						130	5.12	1275		
	220/380	50	3		3.4 / 2						92	3.62	902	20.5	
		60			4 / 2.3						130	5.12	1275		
CY 200	220	50	1	2	8	2 HP	2850	37	2220	1306	152	5.98	1491	31	
		60			10						214	8.43	2099		
	220/380	50	3		CY 5.4 / 3.2						153	5.98	1491	30	
		60			CY 7.1 / 4.2						214	8.43	2099		
	220/380	60	3	Free Air 2 HP-7.5 "	185	7.28	1814	30							
		60		3	2	8 / 4.7	3 HP		3480	44	2640	1553	214	8.43	2099